

## PATENT APPLICATION TRANSMITTAL LETTER

(Large Entity)

Docket No.

2170.00013

## TO THE ASSISTANT COMMISSIONER FOR PATENTS

Transmitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:

Robert Marc Clement and Christopher Davies

For: **RELEASING OF GLAZING PANELS**

Enclosed are:


- ☒ Certificate of Mailing with Express Mail Mailing Label No. **EM284302533US**
- ☒ Five sheets of drawings.
- ☒ A certified copy of a **UK 9817441.0** application.
- ☒ Declaration ☒ Signed. ☐ Unsigned.
- ☒ Power of Attorney
- ☐ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☐ Other:

## CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	45	- 20 =	25	x \$22.00	\$550.00
Indep. Claims	2	- 3 =	0	x \$82.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$790.00
TOTAL FILING FEE					\$1,340.00

- ☒ A check in the amount of **\$1,340.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **02-2712** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated: November 2, 1998



Signature

Daniel H. Bliss, Reg. No. 32,398  
Bliss McGlynn, P.C.  
2075 W. Big Beaver Rd., Ste. 600  
Troy, MI 48084  
(248) 649-6090

cc:

Releasing Of Glazing Panels

Field Of The Invention

5       The present invention relates to the releasing of glazing  
panels from supporting frames, and more specifically to  
the releasing of laminated glazing panels from supporting  
frames (such as laminated vehicle windscreens or  
architectural window panes).

10

Background Of The Invention

15       Reference to glazing panels should be understood to mean  
panels, screens, or windows of glass, plastics or any  
other material substantially transparent to wavelengths in  
the visible range of the spectrum.

20       Vehicle windscreens typically comprise a laminated panel  
structure comprising an outer glass layer, an inner glass  
layer and an interlayer, interposed between the outer and  
inner glass layers. The interlayer typically comprises a  
material transparent to some wavelengths of visible light  
but absorbent to ultraviolet radiation (U.V). (In some  
25       circumstances the inter layer may be absorbent to some  
wavelengths of visible light and also typically some infra  
red radiation.) The inter layer is typically tinted to  
absorb specific wavelengths (particularly U.V.).

30       WO-A-9617737 discloses a method and apparatus for  
releasing bonded transparent screens (typically vehicle  
windscreens) from supporting frames to which they are  
bonded. An improved technique has now been devised.

Summary Of The Invention

35

According to a first aspect, the invention provides a  
method of releasing a glazing panel from a frame to which

0944135 "10298  
35207" 9876540

the panel is bonded by interposed bonding material, the method comprising:

- 5                   i)    arranging light energy delivery means adjacent the glazing panel; and,
- ii)   operating the light energy delivery means to transmit light energy through the screen to effect release of the panel from the
- 10                   frame.

According to a second aspect the invention provides apparatus for releasing a glazing panel from a frame to which the panel is bonded by interposed bonding material,

15                   the apparatus comprising light energy delivery means arrangeable adjacent the glazing panel, and operable to transmit light energy through the screen to effect release of the panel from the frame.

20                   The light energy delivered is preferably of a wavelength substantially in the range 300nm-1500nm (more preferably in the range 400nm-700nm).

25                   The light energy delivered is desirably pulsed according to a predetermined regime, preferably such that the pulse duration (T on) is less than the inter-pulse interval (T off).

30                   Desirably, a single pulse of light energy delivered is of sufficient energy to effect separation of the screen from the frame along a length of the bonding material.

35                   The apparatus preferably includes a pulse forming network (which may include a capacitor and inductor arrangement) to drive the apparatus to produce a light pulse. The

09104186.1103998

apparatus preferably further comprises a trigger network for initiating operation of the pulse forming network.

5 Control means is preferably provided for controlling one or more apparatus parameters including the minimum permissible time elapsing between subsequent light pulses. The control means is therefore preferably linked to the trigger network and/or the pulse forming network.

10 It is preferred that means is provided for selectively adjusting the intensity of the light delivered. This is important in view of the differing degree to which various tinted glazing panels absorb light energy in the wavelength range contemplated. It is preferred that the  
15 apparatus includes different preset parameter settings which may be switched dependent upon the glazing panel tint to be de-bonded.

20 The light energy may be absorbed at the bonding material/panel interface either by the bonding material itself, or by an absorbing layer comprising the panel (such as the frit layer commonly found on vehicle glazing panels) or by a suitable light absorbent coating provided at the interface.

25 The light energy delivery means may be tracked about the periphery of the panel, preferably at a predetermined rate dependent upon the power of the light energy delivery means and the pulse regime. Advantageously tracking means  
30 (preferably motorised tracking means) is provided for this purpose.

35 Alternatively, the light energy delivery means may be hand held and positioned on the glazing manually by an operator. The delivery means may therefore have a manual trigger for initiating a light pulse when the delivery

09434186-110299

head is positioned to the operators satisfaction.

In one embodiment, the light energy delivered comprises a plurality of wavelengths, most preferably in the visible range of the spectrum. In one embodiment it is preferred that the light energy is non-coherent. The light energy preferably attenuates rapidly with distance such that at a few centimetres (preferably less than 10cm, more preferably less than 5cm) from the energy delivery means the light energy density is significantly diminished from its maximum value (preferably falling to 50% maximum value or below). The pulse repetition frequency (defining T off) is beneficially substantially in the range 0.1Hz-10Hz (most preferably substantially in the range 0.3Hz-1Hz). The energy delivered is preferably substantially in the range 100Joules-10,000Joules per pulse (more preferably in the range 500-1500Joules per pulse). The pulse duration (T on) is preferably substantially in the range 1 $\mu$ s-100ms, more preferably 1ms-2ms.

In a preferred embodiment, the energy delivery means comprises electrical gas discharge apparatus. Desirably, operation of the gas discharge apparatus is controlled to limit the pulse rate and/or duration of the light pulse.

The operation of the gas discharge apparatus is preferably controlled by:

- i) charging a capacitor arrangement;
- ii) initiating a trigger pulse to discharge the capacitor arrangement; and,
- iii) discharging the capacitor arrangement through an inductor to the gas discharge apparatus.

Accordingly, for this preferred embodiment, apparatus according to the invention includes energy delivery means comprising electrical gas discharge apparatus.

5

The electrical gas discharge apparatus is controlled to limit the pulse rate of the light delivered. The apparatus preferably includes a pulse forming network having a capacitor and inductor arrangement in which the capacitor discharges through the inductor to drive the electrical gas discharge apparatus to produce a light pulse. The apparatus preferably further comprises a trigger network for initiating the capacitor of the pulse forming network to discharge.

10

15

Control means is preferably provided for controlling one or more apparatus parameters including the minimum permissible time elapsing between subsequent discharge pulses of the electrical gas discharge apparatus.

20

The electrical gas discharge apparatus preferably comprises an electrical gas discharge tube.

25

The electrical gas discharge apparatus desirably comprises a reflector (preferably a parabolic reflector) arranged to direct emitted light in a predetermined direction.

30

The apparatus preferably includes a window through which emitted light is directed to pass through the glazing panel.

35

In an alternative embodiment, the energy delivery means comprises laser energy delivery means operated to transmit laser radiation through the panel to effect release of the glazing panel from the frame, the laser being operated in

0948436 110299

quasi continuous wave mode in which a series of discrete pulses of radiation are transmitted.

5 The pulse regime for the laser is preferably such that the pulse duration (T on) is substantially in the range  $100\mu\text{s}$ -10ms and the inter-pulse interval (T off) substantially in the range  $100\mu\text{s}$ -10ms.

10 In a preferred embodiment, the average laser power is 60W-150W  $\pm 10\%$  (typical peak power 600W  $\pm 20\%$ ); the laser tracking speed is preferably in the range 12mm/S  $\pm 20\%$ .

15 In either embodiment, the apparatus may comprise focussing means arranged to focus the light energy at a predetermined location. For laser delivery means the laser radiation may be focussed to a line, preferably having a line width substantially in the range 200-800 $\mu\text{m}$  (preferably substantially 600 $\mu\text{m} \pm 20\%$ ). Advantageously the line length is substantially in the range 10mm  $\pm 20\%$ .  
20 Where a greater line length is required a composite line comprising a plurality of focussed lines may be generated and arranged in end to end relationship. It is believed that the use of laser radiation focussed to a line for the purpose of releasing a glazing panel from a screen is  
25 novel and inventive per se.

Desirably, the tracking and quasi-continuous pulsed operation of the laser delivery means is coordinated such that the focussed line moves transversely to its  
30 longitudinal direction (that is the line moves in the direction of its width) at a rate such that subsequent pulses of the focussed line overlap. Preferably the degree of linewidth overlap of subsequent pulses is substantially 50% or above (more preferably substantially  
35 80% or above). Operation in this manner ensures good separation of the panel from the frame at the bonding material/panel inner layer interface.

It is preferred that the laser energy delivery means comprises a plurality of laser sources, advantageously arranged in one or more arrays. The laser energy delivery means preferably comprises laser diode means.

5

It has been found that for laminated screens or panels comprising a tinted interlayer in particular, operation of the light energy delivery means in pulsed mode according to the pulsing regime defined herein (quasi continuous wave mode for the laser delivery means embodiment), provides enhanced results, because energy absorption in the body of the screen or panel, particularly at the interlayer, is minimised.

10

15

The invention will now be further described in specific embodiments by way of example only and with reference to the accompanying drawings.

#### Brief Description Of The Drawings

20

Figure 1 is a diagrammatic representation showing pulsed light operation of the light energy and the effect on glazing panel and frit temperature;

25

Figure 2 is a representation similar to that shown in Figure 1 showing prior art continuous wave laser radiation and the effect on frit and glazing panel temperature;

30

Figure 3 is a schmatic representation of a first embodiment of light energy delivery means according to the invention;

35

Figure 4 is a system diagram of a apparatus including the light energy delivery means of figure 3;

Figure 5 is a block diagram of the pulse forming network of the system shown in figure 4;

09184486 " 40293



Figure 6 is a block diagram of the trigger network of the system shown in figure 4

5 Figure 7 is a schematic representation of an alternative embodiment of exemplary apparatus according to the invention performing the method according to the invention;

10 Figure 8 is schematic representation of the apparatus of Figure 7 in side elevation; and,

15 Figure 9 is a schematic representation of the beam tracking showing overlap of the beam widthwise for subsequent laser pulses for the embodiment of figures 7 and 8.

#### Description Of The Preferred Embodiments

20 In the application shown, the apparatus 1 is used to release a vehicular glazing panel (windscreen 16) from a supporting frame 7 to which it is bonded by an interposed, dark coloured polyurethane bonding bead 8 which extends around the entire periphery of the panel 16 in contact  
25 with frame 7.

The windscreen panel 16 comprises an outer glass layer 9, an inner glass layer 10 and intermediately therebetween, an interlayer 11 comprising a tinted sheet material which  
30 is transparent to certain wavelengths of visible light but opaque to others and also to ultra violet (U.V.) radiation. The purpose of the interlayer 11 is to provide structural strength for the windscreen 16 such that in the event of impact the screen remains intact, and  
35 also to provide a U.V. barrier.

Immediately adjacent the bonding bead 8, the periphery of

the inner layer 10 of the windscreen panel 16 is provided with a bonded glass frit layer 12 which is typically dark in colour (more typically black in colour). The purpose of the frit layer is to inhibit the passage of ultra-violet radiation through the screen to impinge upon the polyurethane bonding bead 8 which is typically degradable upon exposure to UV radiation.

Figures 1 and 2 compare light pulsed in accordance with the preferred pulsing regime of the present invention (which will be described in detail hereafter), with continuous wave laser operation known from the prior art system disclosed in WO-A-9617737, and the associated effect on the temperature of the frit layer 12 in relation to threshold of glazing panel integrity (particularly delamination at the panel interlayer 11).

The use of continuous wave laser radiation results in excess heat build-up within the body of the panel 16, particularly at the interlayer 11. This has the effect that increased power is required than would be the case where significant heat build up does not occur within the body of panel 16. Furthermore, the heat build-up within the body of panel 16 at interlayer 11 has been found to result in glass fracture in the region of the interlayer, which increases the absorption within the body of panel 6 leading to a "chain event" in which increasingly greater amounts of energy delivered is absorbed within the body of the panel 16. This results in less energy reaching the frit layer 12/bonding bead 8 interface, thereby reducing the effectiveness of the separation.

The use of pulsed light operation provides repeated bursts of energy to be delivered to the frit layer 12/bonding bead 8 interface, with sufficient time between pulsed energy bursts (T off) to allow heat absorbed within the body of the glazing panel (including at interlayer 11)

to be dissipated.

Referring to Figure 3, the apparatus generally designated 1 comprises a delivery head 4 including an electric gas discharge tube 2 containing a high pressure Noble/inert gas such as Xenon or Krypton. Discharge tube operates to produce an output burst of light of a range of wavelengths in the visible spectrum (approximately in the range 400nm to 700nm). The energy delivered, per pulse is typically in the range 500-1500 Joules however the energy disipates (attenuates) rapidly with distance from the tube. (This is an important operational aspect, as will be described further below).

A housing/casing 3 surrounds the discharge tube and includes shielding sidewalls 5,6 and a spanning visible light transmissible window 7. A parabolic reflector wall 8 is positioned opposite the window 7 to reflect light from the reverse side of discharge tube 2 to pass through the window 7.

Referring to figure 4, the tube is controlled to produce high intensity pulses according to a predetermined pulse regime by means of a control unit 29 operating to aproprate programmed instructions. Control unit 29, controls the operation of a trigger network 30 to activate a pulse forming network 31 to supply current to the tube 2 to produce a light pulse having the desired characteristics.

Referring to figure 5, the pulse forming network 31 includes a capacitor bank 32 charged to a preset voltage by a power supply 33. The capacitor bank 32 remains charged until a trigger pulse from the trigger network initiates discharge in the discharge tube 2, when charge stored in capacitor bank 32 discharges through inductor 34 and a secondry trigger transformer 35, to the tube 2. The

time constant of the discharge (and hence the light pulse duration and "profile") is determined by the values of the inductor 34 and capacitor bank 32. For an operational system a pulse duration of 1ms-2ms has been found to be suitable. For present purposes, pulse duration should be understood to be the time interval between the light power reaching half its maximum value and subsequently falling to half its maximum value. The required pulse duration varies depending upon the optical properties of the glazing panel to be released. For example different glazing tints require different levels of energy to be supplied to effect release, and hence different pulse durations and also different power levels. The capacitor bank 32 and inductor 34 can therefore be reset to appropriate values depending upon the glazing panel to be released in order to modify the "profile" and power of the pulse delivered. The apparatus may be provided with preset settings selectable by the operator (or automatically) appropriate to common glazing tints or other known variables. To adjust the optical power of the apparatus the capacitor charging power supply may be varied.

The pulse repetition frequency (corresponding to the length of the inter-pulse interval (T off)) is important to ensure that the period between successive pulses is sufficient to allow the heat absorbed in the thickness of the screen to dissipate before more energy is delivered. The control unit 29 acts to override the manual trigger to inhibit the trigger network 30 from initiating discharge until the required time period has elapsed. The pulse repetition frequency is typically controlled to be in the range 0.3Hz-1Hz.

The energy delivered per light pulse is selected according to the tint or other qualities of the glazing panel but typically varies between 500-1500Joules per pulse.

Because non-laser light is used, the energy attenuates rapidly with distance from the optical head 4 and is therefore sufficient to effect debonding of the glazing panel but less susceptible to unauthorised or accidental operator misuse. This is an important safety feature of using this embodiment.

In use, the optical delivery head is positioned as shown in Figure 3 and a manually actuatable trigger is operated to produce a single light pulse which passes through the screen 6 and is absorbed at the frit layer 12 and/or the bonding bead 8. The frit 12 or bonding bead rapidly heats up and separates from the screen typically either by glass ablation, temperature carburisation of the bead 8, or other thermal mechanisms. Typically a single shot/pulse is sufficient to effect release over a length of screen corresponding to the length of the discharge tube 2 (typically 5-15cm) although multiple shots may be used (for example at lower power to minimise frit damage). The operator then moves on to an adjacent portion of the screen periphery before instigating a further light pulse. The procedure is repeated about the entire width of the screen to effect complete release.

It has been found that significantly improved results are achieved where the light delivered is in the visible range of the spectrum, and the light is pulsed according to a regime in which a series of discrete pulses of light are transmitted, the pulse duration (T on) being substantially in the range  $1\mu\text{s}$  to 100ms (more preferably in the range 1ms-2ms) and the pulse repetition frequency being substantially in the range 0.1Hz-10Hz (more preferably in the range 0.3Hz-1Hz).

Use of the pulsing regime described herein and lower wavelengths of light (in the visible spectrum) have been found to provide significantly enhanced results in which

a greater proportion of the energy delivered is concentrated at the frit layer 12/bonding bead 8 interface, and excess heat build-up (and associated glass fracture) at interlayer 11 is avoided or at least ameliorated.

Referring to the apparatus shown in figures 7 to 9, a six bar array of laser diodes 102 is provided within a housing 103 mounted in a delivery head 104 of the apparatus. The diode array comprises two banks each comprising three diodes 102; focussing optic 105 is provided to focus the beams produced by each bank of diodes 102 to form respective focussed lines (approx. 25 to 30mm from optics 5) arranged in end to end relationship.

The laser delivery head 104 is used to deliver laser radiation through the screen, being focussed to line by the focussing optic 105 (as described above) in order for energy to be concentrated at the frit layer 112. Separation of the panel 106 from the frame 107 is effected as a result of energy absorption at the frit layer 112/bonding bead 108 interface resulting in rapid heating and either cleavage or degradation of the frit material 112 comprising the panel 106, or degradation of material comprising the bonding bead 108 (or degradation of a primer coat applied to the glazing panel prior to installation in contact with the bonding bead). The release mechanism may comprise a combination of the mechanisms described.

In the apparatus shown in Figures 7 to 9, the preferred laser parameters for quasi continuous wave operation are as follows:

Wavelength 808nm;  
Peak power 600 watts;  
Average power 120 watts (20% duty cycle)

T on - 1ms;  
T off - 4ms;  
Repetition rate 200 hertz.

5 The preferred requirements for the optical arrangement 105 are to produce a line focussed beam having the following characteristics:

Focal length 25-30mm;

10 Line length on screen 20mm (comprising 2 x 9mm and 1mm space between);

Line width 600 $\mu$ m (average).

15 In one embodiment, the delivery head 104 is carried by a motorised tracking system (not shown) arranged to track the head 104 about the entire periphery of glazing panel 106 to effect complete release of the panel 106 from frame 107. The operation of the tracking system 104 and laser delivery by head 104 are co-ordinated (by control means-  
20 not shown) such that the speed of tracking about the frame is maintained at a predetermined rate.

25 As shown in Figure 9 it is an important feature for optimum performance that subsequent pulses of the line focussed beam 121a, 121b overlap widthwise; the greater degree of overlap, the more improved the separating capacity. As shown in Figure 9, for a system having the above identified parameters, the translational speed of the beam could be 6.6mm per second, which would result in  
30 the beam moving widthwise by a distance of 33 $\mu$ m per pulse. For a beam of 600 $\mu$ m width this would provide a beam overlap of approximately 95%.

35 The invention has primarily been described in relation to releasing of laminated glazing panels. It will however be understood that the invention is equally suitable for use with other glazing panels providing similar benefits in

minimising overheating of material comprising the panel.

00494930 110393



We claim:

1. A method of releasing a glazing panel from a frame to which the panel is bonded by interposed bonding material, the method comprising:

i) arranging light energy delivery means adjacent the glazing panel; and,

ii) operating the light energy delivery means to transmit light energy through the screen to effect release of the panel from the frame.

2. A method according to claim 1, wherein the light energy delivered is of a wavelength substantially in the range 300nm-1500nm.

3. A method according to claim 2, wherein the light energy delivered is of a wavelength substantially in the range 400nm-700nm.

4. A method according to claim 1, wherein the light energy delivered comprises a plurality of wavelengths.

5. A method according to claim 1, wherein the light energy delivered is pulsed according to a predetermined regime.

6. A method according to claim 5, wherein the pulse duration ( $T_{on}$ ) is substantially in the range 1 $\mu$ s-100ms.

7. A method according to claim 6, wherein the pulse duration is substantially in the range 1ms-2ms.
8. A method according to claim 1, wherein the pulse repetition frequency is substantially in the range 0.1Hz-10Hz.
9. A method according to claim 1, wherein the pulse repetition frequency is substantially in the range 0.3Hz-1Hz.
10. A method according to claim 1, wherein the pulse duration (T on) is less than the inter-pulse interval (T off).
11. A method according to claim 5, wherein a single pulse of light energy delivered is of sufficient energy to effect separation of the screen from the frame along a length of the bonding material.
12. A method according to claim 1, wherein the light energy delivery means is hand held and positionable relative to the glazing manually by an operator.
13. A method according to claim 1, wherein the light energy attenuates rapidly with distance such that at a few centimetres from the energy delivery means the light energy density is significantly diminished from its maximum value.
14. A method according to claim 13, wherein at a distance substantially in the range 5cm or less from the delivery means the light energy density is 50% maximum value, or below.

15. A method according to claim 1, wherein the light energy is non-coherent.

5 16. A method according to claim 1, wherein the energy delivery means comprises electrical gas discharge apparatus.

10 17. A method according to claim 16, wherein operation of the gas discharge apparatus is controlled to limit the pulse rate and/or duration of the light pulse.

18. A method according to claim 17, wherein the operation of the gas discharge apparatus is controlled by:

15 i) charging a capacitor arrangement;

ii) initiating a trigger pulse to discharge the capacitor arrangement; and,

20 iii) discharging the capacitor arrangement through an inductor to the gas discharge apparatus.

25 19. Apparatus for releasing a glazing panel from a frame to which the panel is bonded by interposed bonding material, the apparatus comprising light energy delivery means arrangeable adjacent the glazing panel, and operable to transmit light energy through the screen to effect release of the panel from the frame.

30 20. Apparatus according to claim 19, which is controllable to pulse the light energy delivered.

35 21. Apparatus according to claim 20, wherein the apparatus is controllable to adjust and/ or limit:

0948644099

5                   the pulse duration of the light delivered,  
and/or,

10

15

20

25

30

35

26. Apparatus according to claim 19, wherein the energy

delivery means comprises electrical gas discharge apparatus.

5 27. Apparatus according to claim 25, including a pulse forming network having a capacitor and inductor arrangement in which the capacitor discharges through the inductor to drive the electrical gas discharge apparatus to produce a light pulse.

10 28. Apparatus according to claim 27, including a trigger network for initiating the capacitor of the pulse forming network to discharge.

15 29. Apparatus according to claim 26, including control means for controlling one or more apparatus parameters including the minimum permissible time elapsing between subsequent discharge pulses of the electrical gas discharge apparatus.

20 30. Apparatus according to claim 26, wherein the discharge apparatus comprises an electrical gas discharge tube.

25 31. Apparatus according to claim 26, wherein the electrical gas discharge apparatus comprises a reflector arranged to direct emitted light in a predetermined direction.

30 32. Apparatus according to claim 19, wherein the apparatus comprises a window through which emitted light is directed to pass through the glazing panel.

35 33. A method according to claim 1, wherein the energy delivery means comprises laser energy delivery means operated to transmit laser radiation through the

panel to effect release of the glazing panel from the frame, the laser being operated in quasi continuous wave mode in which a series of discrete pulses of radiation are transmitted.

5

34. A method according to claim 33, wherein the laser radiation is focussed to a line at the interface between the bonding material and the panel.

10

35. A method according to claim 34, wherein the focussed line has a line width substantially in the range 200-800 $\mu$ m.

15

36. A method according to claim 34, wherein the focussed line has a line width substantially in the range 600 $\mu$ m  $\pm$  20%.

20

37. A method according to claim 33, wherein the laser delivery means is tracked about the panel at a pre-determined rate, the tracking and quasi-continuous wave pulsed operation of the laser delivery means being coordinated such that the focussed line moves in the direction of its width at a rate such that subsequent pulses of the focussed line overlap.

25

38. A method according to claim 37, wherein the degree of linewidth overlap of subsequent pulses is substantially 50% or above.

30

39. A method according to claim 37, wherein the degree of linewidth overlap of subsequent pulses is substantially 80% or above.

35

40. A method according to claim 33, wherein the laser energy delivery means is hand held and positionable relative to the glazing manually by an operator.

00184186 110299  
SECRET

41. A method according to claim 33, wherein the wavelength of the laser energy is substantially in the range 650-1000nm.
- 5 42. A method according to claim 33, wherein the wavelength of the laser energy is substantially in the range 650-750nm.
- 10 43. Apparatus according to claim 33, wherein the laser delivery means comprises a plurality of laser sources arranged in one or more arrays.
44. Apparatus according to claim 33, wherein the laser delivery means comprises laser diode means.
- 15 45. A method and/or apparatus according to any preceding claim for use in releasing a vehicular glazing panel from a supporting frame.

Abstract Of The Disclosure

Releasing of Glazing Panels

5

10

15

20

Glazing panels such as vehicle windscreens bonded to a supporting frame are released by firstly arranging light energy delivery means adjacent the panel and subsequently transmitting light energy from the delivery means through the panel thereby to effect release of the panel from the frame. The light may be pulsed according to a predetermined regime and may be delivered by a discharge lamp having rapidly attenuating intensity, or quasi continuous wave pulsed laser. The mechanism of panel release may be by thermal degradation of the bonding material, cleavage of material at a surface of, or within the body of the panel, or a combination of such mechanisms.

004343403



FIG 1

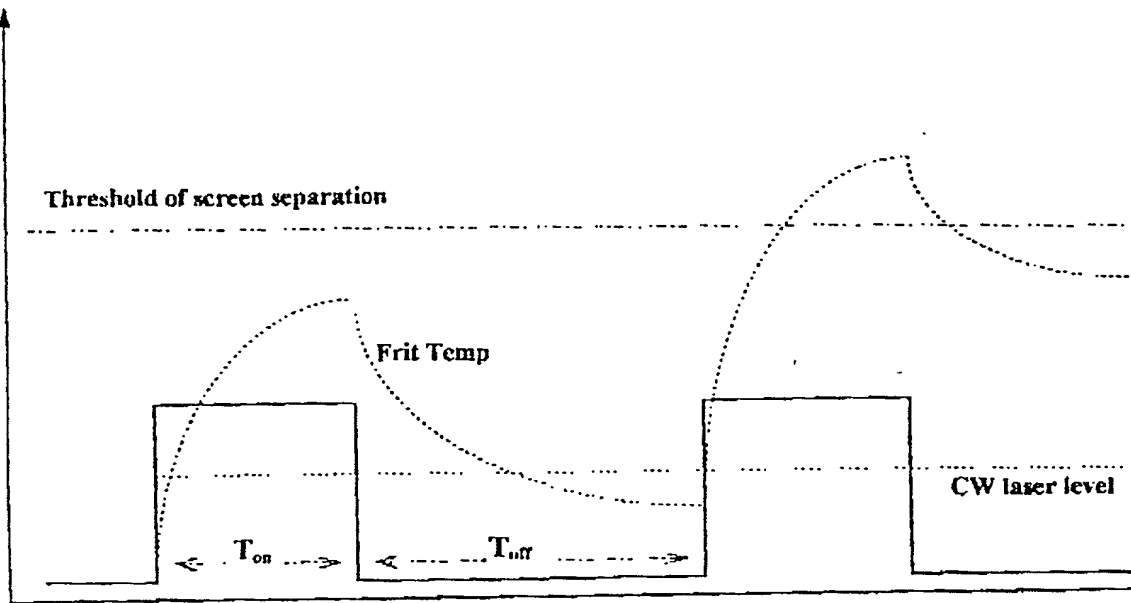


FIG 2

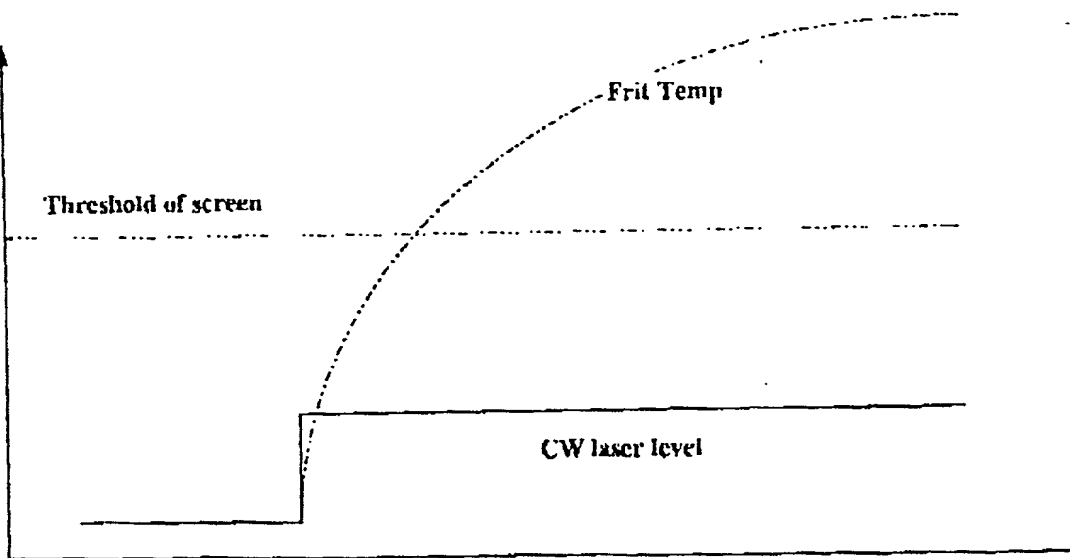


FIG 3

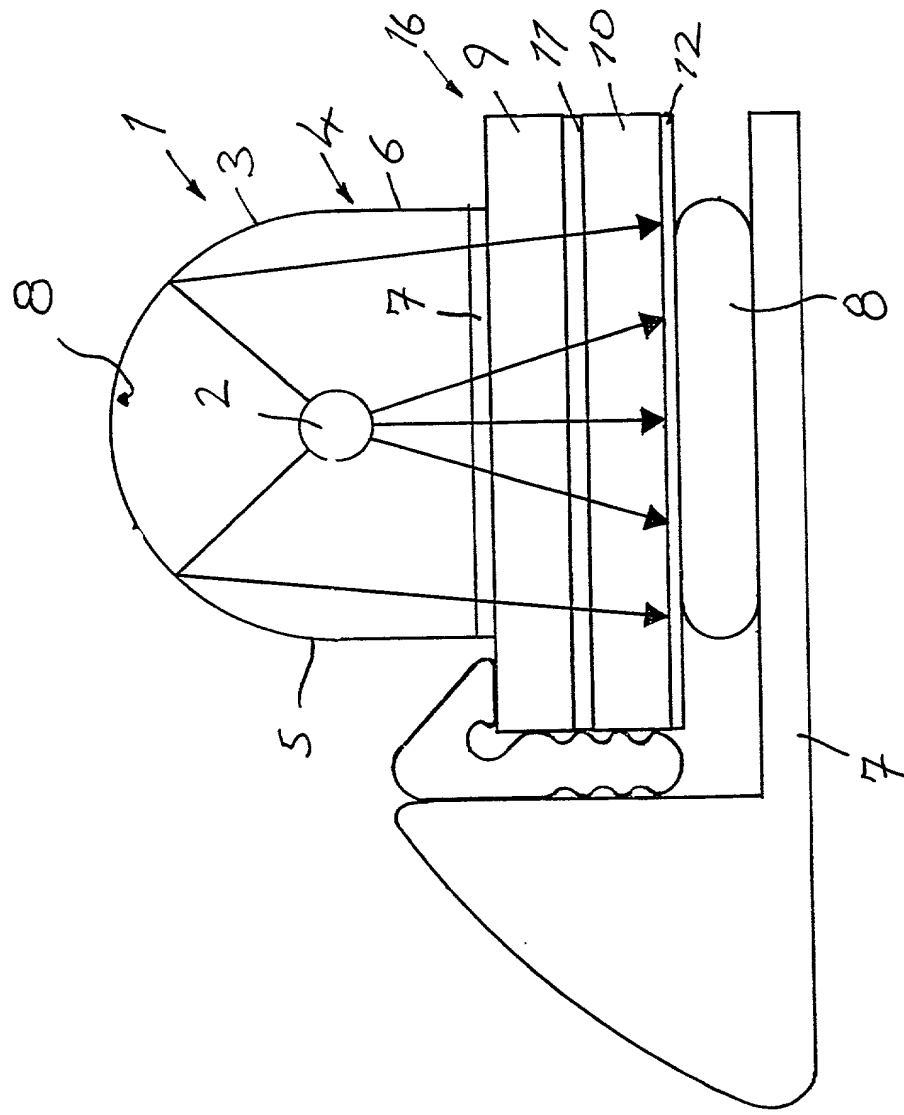


FIG 4

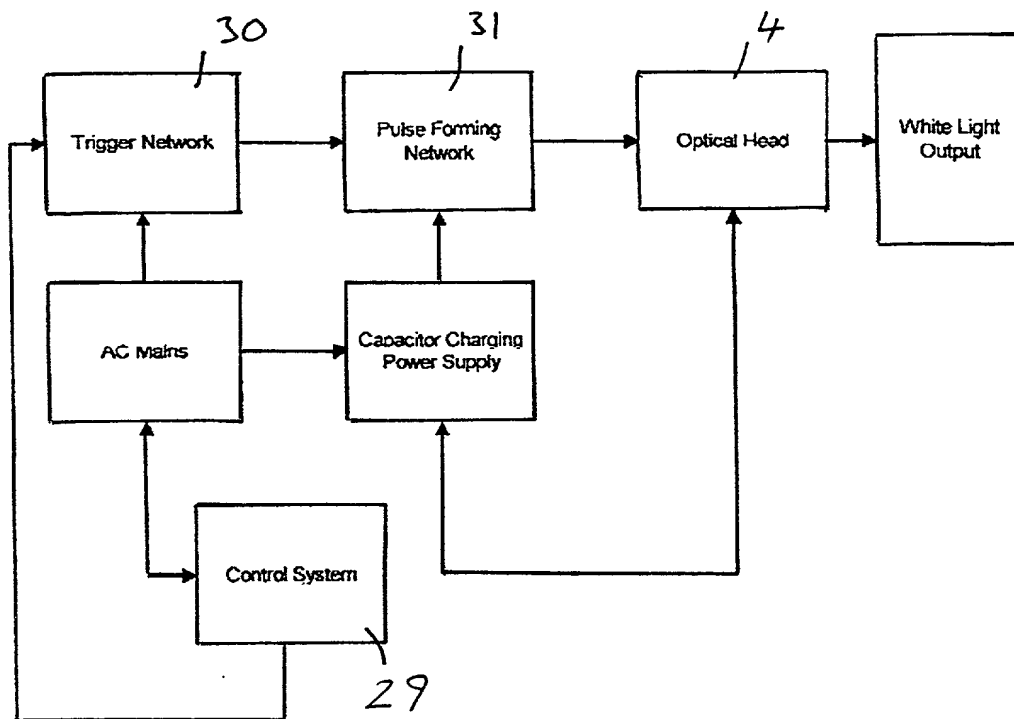


FIG 5

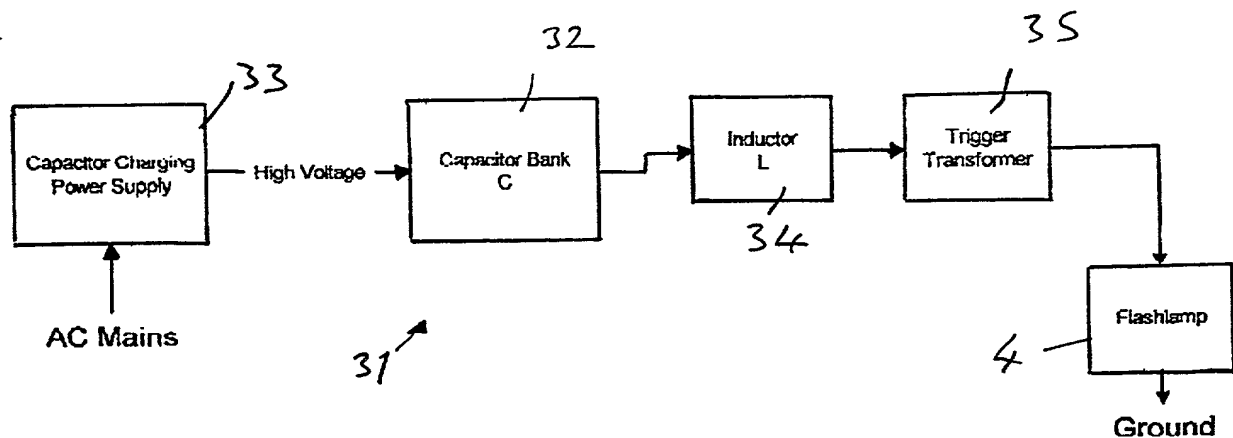
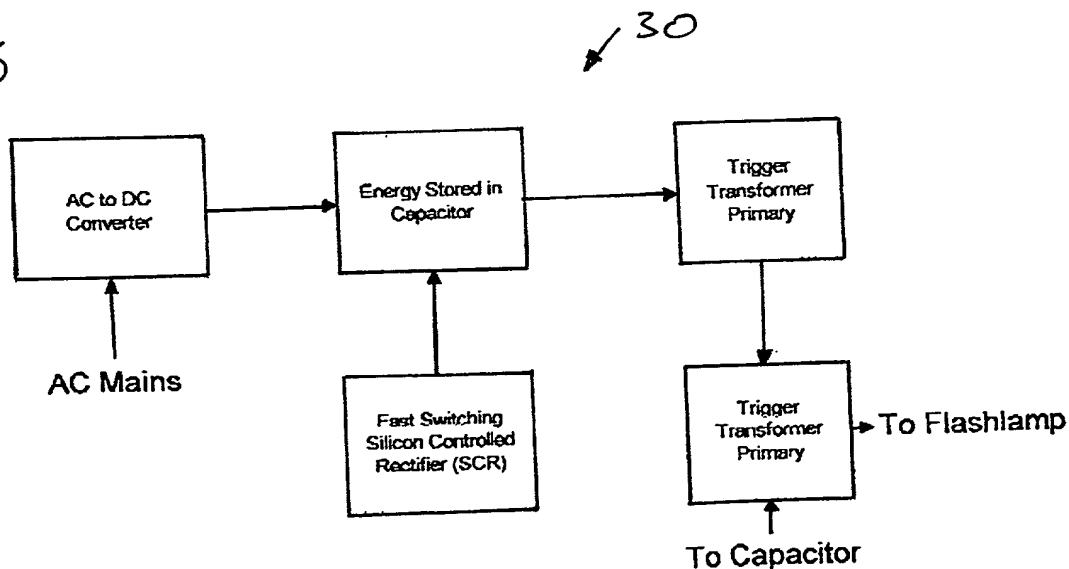


FIG 6





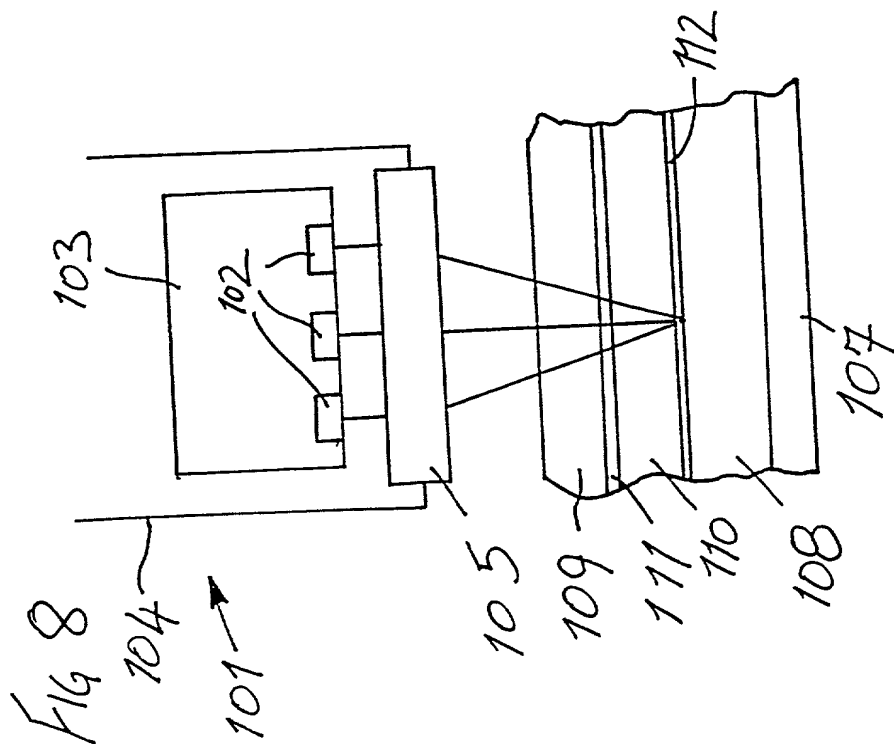



FIG 9

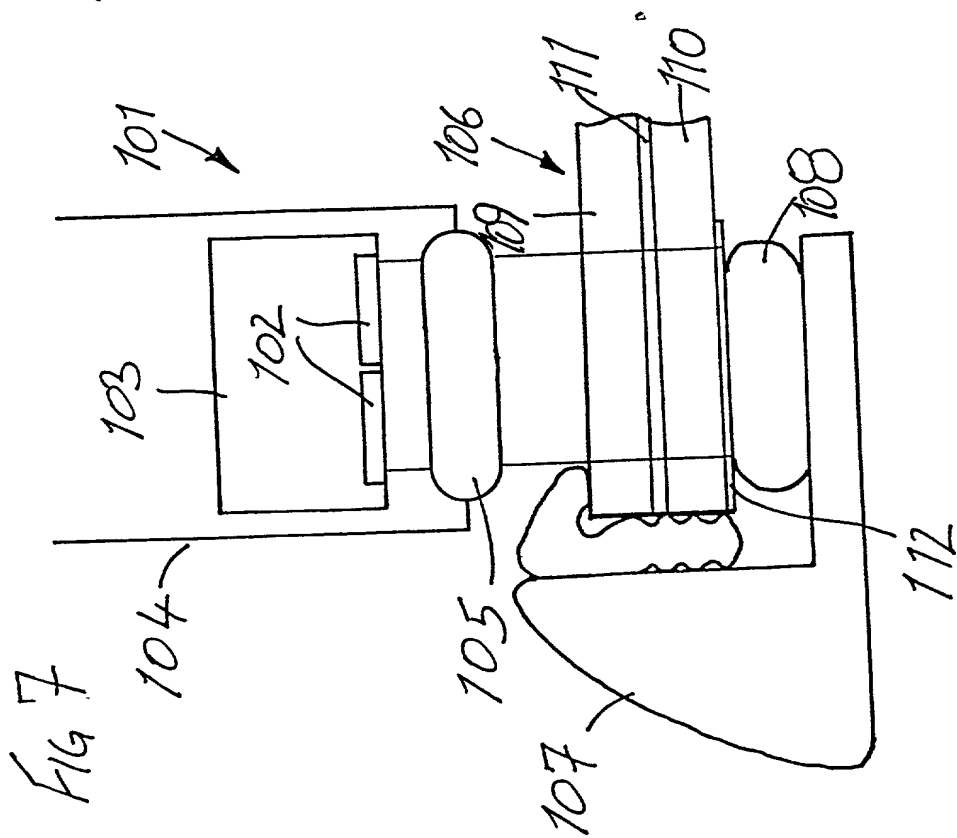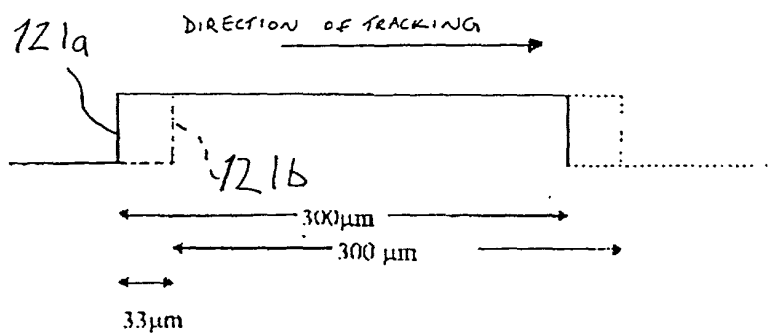

Beam overlap = 89%

0913436-110293

United States Patent & Trademark Office  
Office of Initial Patent Examination — Scanning Division

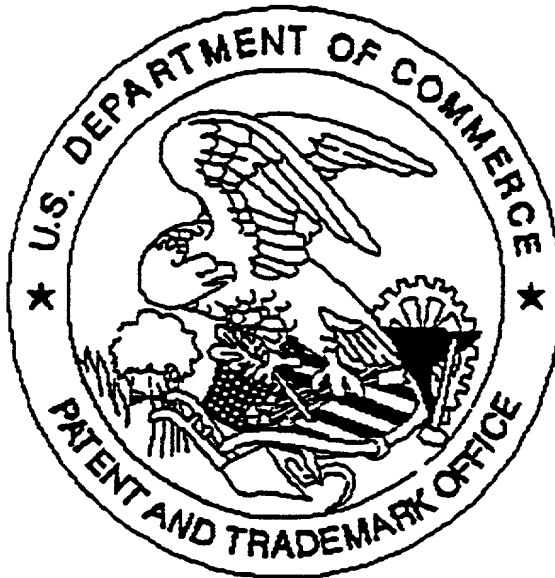

Application deficiencies were found during scanning:

☐ Page(s) \_\_\_\_\_ of DECLARATION were not present  
for scanning. (Document title)

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Scanned copy is best available.

5520TT 98T43T60